



Justrite Safety Group

130 - SABRE™
PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



130 - SABRE™ A step above the commodity entrance mat, Sabre™ is designed for use in light to medium foot traffic areas. Sabre's™ durable Decalon® fibers provide moisture and dirt retention at entrances, lobbies, and passageways; reducing slip hazards and floor care maintenance. A vinyl non-slip backing helps to minimize mat movement.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- Drying mat
- Decalon® fibers provide moisture and dirt retention
- 19 ounces of tufted cut-pile Decalon® per square yard
- Low profile for use in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement



MODEL: 130

SPECIFICATIONS














Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4x8'		
Roll Sizes	3'x60', 4'x60', 6'x60'		
Thickness	5/16"		
Cut Lengths	3', 4', and 6' widths (up to 60' long)		
Colors	 Charcoal	 Brown	 Red/Black
	 Hunter Green	 Slate Blue	 Navy
	 Burgundy		

APPLICATIONS

- Schools
- Hospital Entrances
- Lobbies
- Entranceways



Performance:

	Good	Better	Best	Superior
Wear Retention				
Crush Resistance				
Soil Resistance				
Function & Appearance				



TESTING DATA

Test	Test Description	Results
ASTM D3884-01	Abrasion Resistance ASTM D3884-01 (Results measured in weight loss - %)	-1.17 grams (3.7%)
ASTM D6540-05	Accelerated Soiling (Based on visual inspection)	Based on Visual Inspection 4.0 - Vacuum Rating 5.0 - Rating After Extraction
ASTM D5252-98a	Accelerated Wear (Based on visual inspection @ 4,000 cycles)	Based on visual inspection @ 4,000 cycles Considerable change in appearance and color
Water Retention	(Results measured in weight gain) Gallons per sq. yd.	Weight Gain = .415 gals./yd ²
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass

*Testing performed by an independent test laboratory.

NOTRAX®

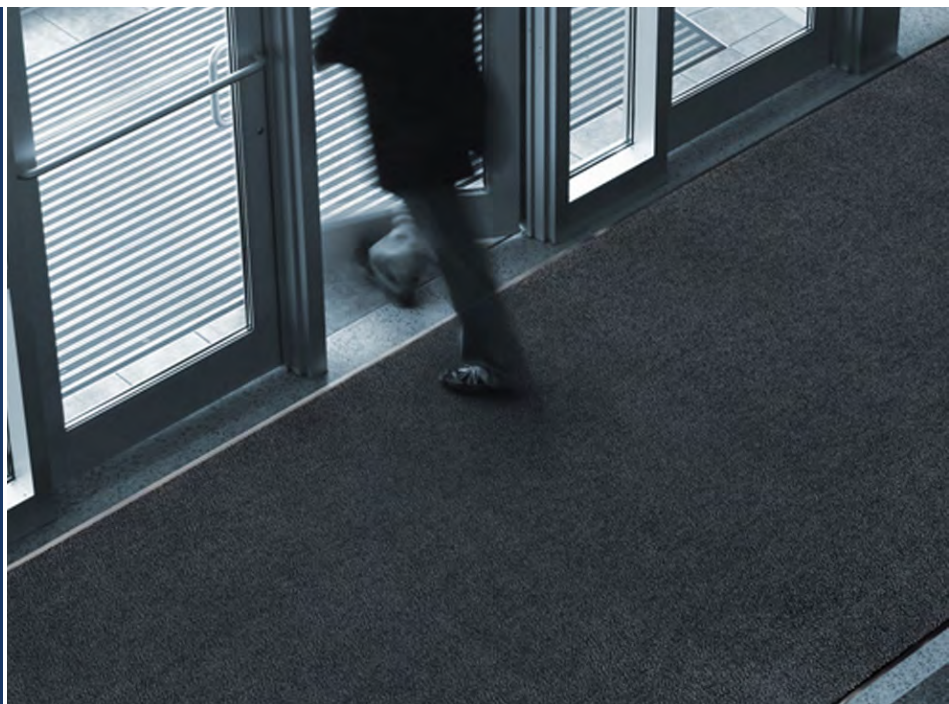
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.